

# KAMDEN 4-LIGHT BATH

## PRODUCT FEATURES

- Two ultra-clean pressed-glass square shades provide ample amount of light
- Die-cast metal frame with hand-polished glass
- Fully dimmable integrated LED lamp
- Complementary Kamden Wall sconce also available by Tech Lighting
- Available in a three light and four light vanity option
- 5 year warranty with LED lamping option, visit [techlighting.com](http://techlighting.com) for more warranty details



## LAMPING

Includes 120 volt 43 watt, 2620 delivered lumens, 3000K LED module. Dimmable with low-voltage electronic or triac dimmer.

Chrome



Chrome

Satin Nickel

## ORDERING INFORMATION

700BCKMD	LENGTH (A)	FINISH	LAMP
	4 4"	C CHROME	-LED930 LED 90 CRI 3000K 120V
		S SATIN NICKEL	-LED930-277 LED 90 CRI 3000K 277V

700BCKMD \_\_\_\_\_

JOB NAME \_\_\_\_\_


NOTES \_\_\_\_\_



# KAMDEN 4-LIGHT BATH

## SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Glass
NET WEIGHT	6 lbs
HEIGHT	5in
WIDTH	5.6in
LENGTH	31.4in
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

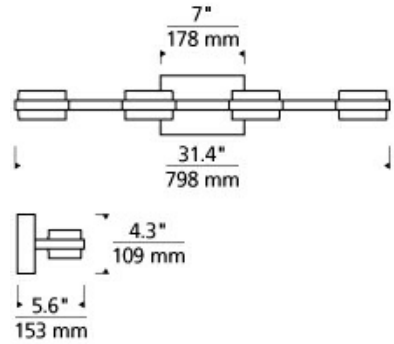

## LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		2620		
WATTS		5		
MAX WATTAGE PER BULB		43W		
INPUT VOLTAGE		120V 277V		
DIMMING TYPE*		ELV, TRIAC 0-10V		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70		50000		
AVERAGE BULB HOURS		50000		
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

\* Dimming information available at [www.techlighting.com/Downloads#dimming](http://www.techlighting.com/Downloads#dimming)

\*\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

## T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

\* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

